

9 Series

730kVA – 3630kVA



Diesel generating sets worldwide



Please Note: Above photos may not relate directly to accompanying datasheet model

DN3-AJ1650-B1

Diesel (Water cooled Fuel Optimised), Compact, Three Phase

		Prime		Standby	
Genset model		DN3-AJ1650P-5B1		DN3-AJ1650S-5B1	
10000 V	50Hz	1525.0 kVA	1220.0 kW	1660.0 kVA	1328.0 kW
400 V	50Hz	1525.0 kVA	1220.0 kW	1660.0 kVA	1328.0 kW
415 V	50Hz	1525.0 kVA	1220.0 kW	1660.0 kVA	1328.0 kW
Genset model		DN3-AJ1650P-6B1		DN3-AJ1650S-6B1	
380 V	60Hz	N/A kVA	N/A kW	N/A kVA	N/A kW
480 V	60Hz	N/A kVA	N/A kW	N/A kVA	N/A kW

Ratings at 0.8pf

Prime: This rating is for the supply of continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation on the annual hours of operation and 10% overload power can be supplied for one hour in twelve hours.

Standby: This rating is for the supply of continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted.




Engine	Mitsubishi	S12R-PTAA2	N/A
Number of cylinders		12 V	12 V
Cubic capacity	litre (cu inch)	49.(2990.16)	N/A(N/A)
Aspiration		Turbocharged	N/A
Alternator		Newage Stamford	Newage Stamford
Frequency	Hz	50	60
Engine speed	rpm	1500	1800
Fuel tank capacity (standard)	litre (USgal)	N/A(N/A)	N/A(N/A)
Fuel consumption at full rating: Prime	litre /h (USgal /h)	320.85(84.77)	N/A(N/A)
Standby	litre /h (USgal /h)	351.61(92.90)	N/A(N/A)
Heat rejection to exhaust system (max)	kW (BTU /min)	1206.00(68639.49)	N/A(N/A)
Heat rejection to cooling system (max)	kW (BTU /min)	1021.00(58110.22)	N/A(N/A)
Total radiated heat (max)	kW (BTU /min)	114.00(6488.31)	N/A(N/A)
Exhaust temperature (max)	deg C (deg F)	TBA(TBA)	TBA(TBA)
Radiator cooling air flow	cu m /min (cfm)	1668.00(58905.42)	N/A(N/A)
with max Restriction	mm (inch) H ₂ O	20.00(0.79)	N/A(N/A)
Combustion air flow (max)	cu m /min (cfm)	129.00(4555.64)	N/A(N/A)
Exhaust gas flow (max)	cu m /min (cfm)	343.00(12113.05)	N/A(N/A)
with max allowable back pressure	mm (inch) H ₂ O	600.00(23.62)	N/A(N/A)

Note: Standard reference conditions: 25deg C (77deg F) air inlet temperature, 152.4m (500feet) above sea level, 60% relative humidity. All engine performance data based on the above mentioned maximum continuous ratings. Fuel consumption data at full load for diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, class A2.

Dimensions: mm (inch)	
Length (A)	5760(226.8)
Width (B)	2150(84.6)
Height (C)	2700(106.3)
Max longitudinal projection (D)	N/A(N/A)
Max width projection per side (E)	N/A(N/A)
Maximum height total (F)	N/A(N/A)
Weights: kg (lb)	
Dry weight (with lube oil)	13120(28923.0)
Wet weight (with lube oil and coolant)	13500(29760.8)

Weight is an estimate, excluding fuel and options.

Sound pressure levels: dB(A)		
	50Hz 1500rpm	60Hz 1800rpm
15m, 75% load	TBA	TBA
15m, 100% load	TBA	TBA
7m, 75% load	TBA	TBA
7m, 100% load	TBA	TBA
1m, 75% load	TBA	TBA
1m, 100% load	TBA	TBA

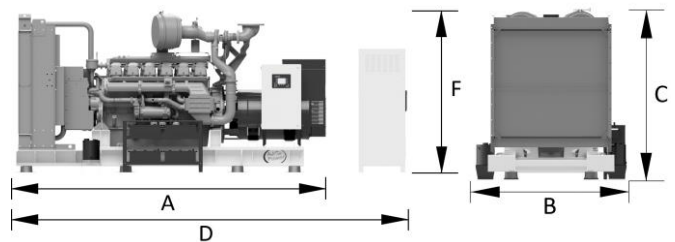

In line with our policy of continuous development, we reserve the right to change specification without notice.

Specification should be confirmed prior to purchase.

We have made every effort to provide accurate information. However we are not responsible for errors or omissions.

AJ Power Limited

1 Charlestown Drive, BT63 5GA, Northern Ireland, United Kingdom
Tel: +44 (0)28 3836 1000 Fax: +44 (0)28 3836 1010 Web: www.ajpower.net Email: sales@ajpower.net

DN3-AJ1650-B1-40A-MA-20200630-EN