



TUTT BRYANT
POWER PRODUCTS  SERVICES



HBD-100-200 A

Battery Energy Storage System (BESS)

for clean and sustainable energy

TECHNICAL SPECIFICATIONS

HBD-100-200 A

Battery Energy Storage System (BESS)



What is the HBD-100-200 A?

A rechargeable Battery Energy Storage System (BESS), designed to store and seamlessly distribute instant power to multiple commercial and industrial electrical loads. The HBD BESS delivers the power to work anywhere, providing access to environments where there are challenges with grid availability and stability.

Maximize your renewable potential and experience the value of uninterrupted power!

What can it power?

The HBD is best suited to power equipment with intermittent or high current load characteristics such as tower cranes, passenger hoists, batching machines, and welders. Other common applications include remote area communities, construction site base loads, electrified plant such as cranes and earthmoving equipment plus grid stabilisation applications.

How does it work?

This mobile and modular solution includes batteries, power conversion system (PCS), control system, battery cooling, and a fire suppression system.

It can be connected to external PV power, diesel generator and grid power. Environmentally friendly, no emissions and low noise. Reducing grid dependency, improving power supply quality and ensuring the power consumption of emergency loads.

Why choose the HBD-100-200 A?



Cost Saving

Reduces 80% of fuel costs



Eco-friendly

100% electricity, no diesel needed



Quiet

Suitable for residential and noise sensitive areas



Fast Charging

High power input



Zero Downtime

Constant uptime via ready to deliver stored energy



Plug-and-play system

Industry standard connection points



Hybrid Mode

Synchronisable with other BESS, the Grid, and Diesel Generators for higher output




Built-in fire-safety system

Aerosol fire suppression system with heat, smoke, and gas detection

Specifications

ITEM	
Model	HBD-100-200 A
Rated Output Power @ 25°C	100 kW
Rated Output Voltage	400V @50Hz, 3ph.
Battery Storage Capacity	200.7 kWh
Max. Current (AC)	167 A
Max. Output Power	116 kW
Loading Dimensions (L x W x H)	1760 x 1321 x 2200 mm
Weight	2600 kg
Operating Temperature Range	-25 ~ 50°C
Communication	CAN / RS485
Ingress Protection	IP54
Cooling System	HVAC
Fire Protection System	Aerosol Fire Suppression (CE)
Cell Type	LFP (LiFePO ₄)
Expected Lifetime	> 10 years
Battery System Voltage	716.8 VDC

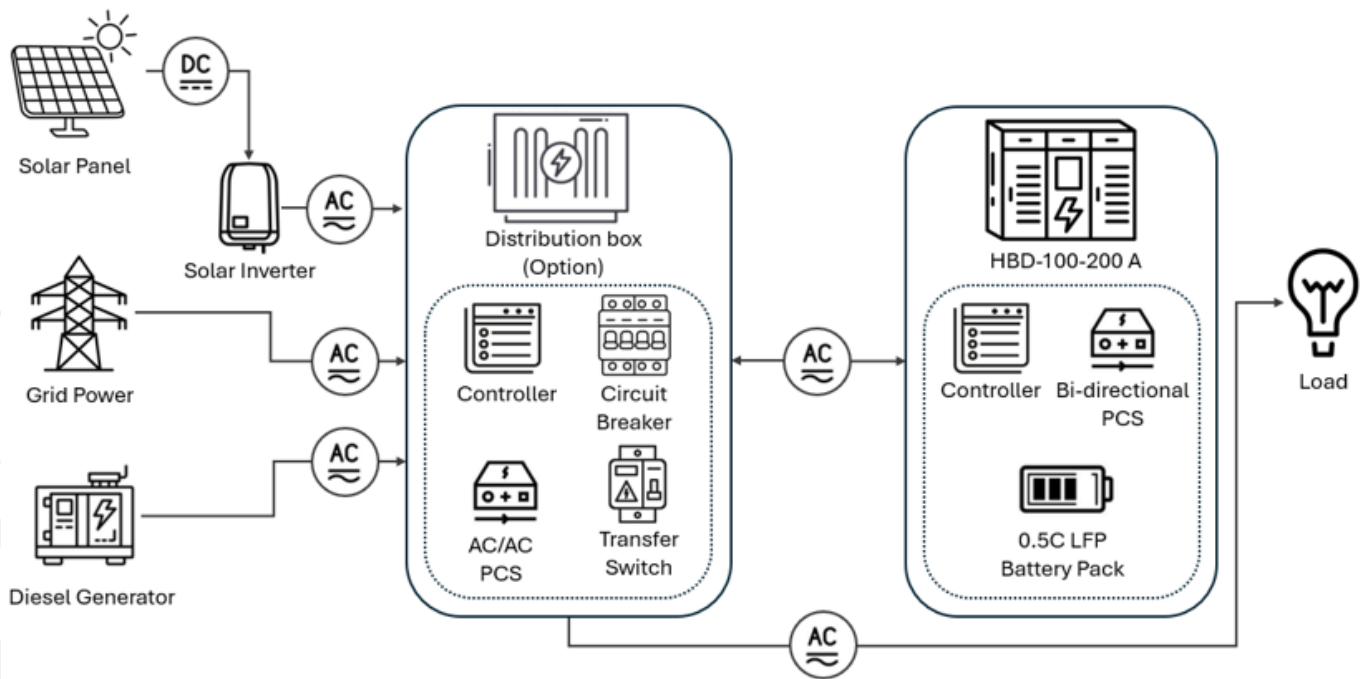



TUTT BRYANT GO GREEN

ABOUT

Tutt Bryant Go Green aims to introduce innovative and sustainable products, services, and solutions to the domestic market by tapping into the vast and diverse network of global partners and suppliers that have been meticulously assembled by Tutt Bryant over the years.

It is also Tutt Bryant's goal to develop home-grown solutions that are optimised to Australia's unique conditions by utilising in-house capabilities and collaborating with local enterprises.

Go Green provides a reliable national approach, aligned with our customers sustainability targets including:

- Energy Efficiency
- Plant Electrification
- Low Carbon Fuels and Energy Sources

Our Approach

The Tutt Bryant Go Green initiative seeks to increase the sustainable options available in Tutt Bryant's portfolio through:

- Working with our committed OEM partners
- Broad collaboration with a multi divisional focus
- Leveraging from our depth in resources
- Reliable National approach
- Financing options
- Balance of Plant capability
- Testing facilities
- Aligning growth with our customers



TUTT BRYANT POWER PRODUCTS & SERVICES LOCATIONS



NSW

SYDNEY

6-8 Ferngrove Place
South Granville 2142
02 9780 7200

QLD

BRISBANE

539 Boundary Road
Archerfield 4108
07 3373 6400

SA

ADELAIDE

908 Main North Road
Mawson Lakes 5095
08 8162 0900

WA

PERTH

50 Great Eastern Highway
South Guildford 6055
08 9478 0600

BUNBURY

6-10 Hawkins Street
East Bunbury 6230
08 9796 8700

VIC

DANDENONG

80-86 Frankston-Dandenong Road
Dandenong 3175
03 9554 0300

EPPING

1/189 O'Herns Road
Epping 3076
03 9554 0380

1300 658 888

tuttbryantpower.com.au | powergen@tuttbryant.com.au

